





Heavy-Duty Industrial Wood Pre-Crushing Compactor

EM-60W



Quickly rids yard and facility of wood waste


- Shreds and compacts in one machine
- Significant volume reduction increases payload weights & lowers transportation cost
- Machine processing is safer for employees
- Eliminates manual sawing or handling
- · Handles nails, bolts, hinges, and corner bracing
- Connects to standard receiving container
- Clean quiet electric drive, no hydraulic leaks

Komar EM-60W Auger-Pak®

The Komar EM-60W Auger-Pak® is a heavy-duty, all-electric industrial pre-crushering compator, ideally suited for 84" x 48" pallets, wooden crates up to 60" x 48" x 48", and spools with a 60" diamater. Occasional pieces up to 120" in length can be processed, but may require additional handling. The Auger-Pak® features top of the line processing components. Constructed with a solid steel shaft and cast alloy steel flights, the auger screw effortlessly shreds & compacts material directly into a standard 40 cubic yard receiving container. The powerful all-electric cycloidal drive generates high-density payloads, while eliminating the hydraulic oil leaks inherent in ram style compactors. In addition, the auger's automated processing will cut labor cost while making your workplace safer.



* Load weights vary depending on material and loading method










69"

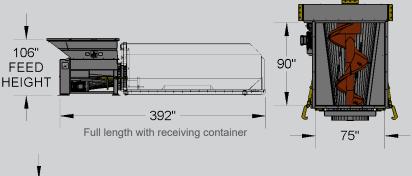

	 95" —

Dimensions and process data for reference only

126"

Machine Specifications			
Horsepower	60		
Footprint (L x W x H)	126" x 95" x 69"		
Process Chamber (L x W)	90" x 75"		
Full System Weight (lbs.)	24,358		
RPM / Torque (ft-lbs.)	10.17 / 30,972		


Processing Specifications				
Peak Tons per Hour	8			
Standard Pallets/Charge	12			
Pallet Size* (L x W)	84" x 60"			
Crate Size* (LxWxH)	84" x 48" x 48"			
Cable Spool Size* (dia.)	60"			

^{*} Occasional pieces up to 96" in length can be processed but will require special handling.


Yard Installation Specifications Full Length w/ Container 392" Footprint w/ Concrete Pad 415" x 119" Power Requirement 3 phase, 460/480 V, 60 hz Overcurrent Protection 175 amp Rear View

• Shown with clear standard receiving container to illustrate attachment.




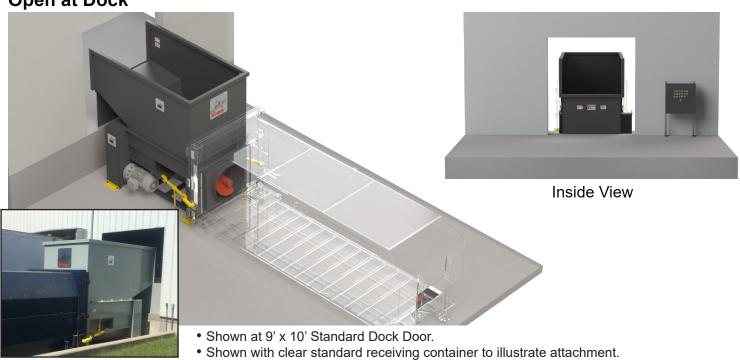

Dock Enclosure

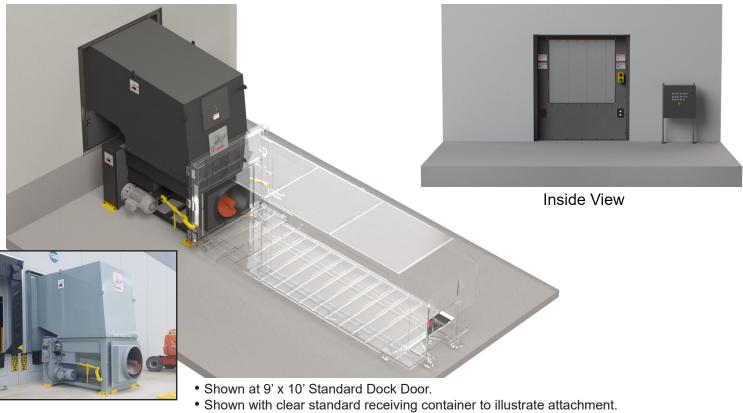



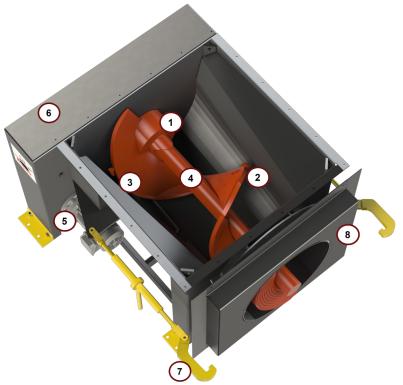

K線mgf **Auger-Pak**®

EM-W Technology Overview

1 Patented Solid Lube Bearing Support System

Allows for the use of the biggest and most powerful auger screws in the industry, resulting in maximum compaction force.

² Teeth

All of our wood machines include teeth to help with the initial breakdown of dense material.

Using the highest quality components to construct our auger screws extends service life. The mass and shape of the cast flights increases overall strength and durability, while providing more efficient material delivery to the receiving container. Our patented tapered shaft uniquely distributes force along the shaft, minimizing stress on the bearings and maximizing screw life.

(5) Cycloidal Drive with 500% Shock Load

Don't judge a drive strictly by the motor's horsepower, especially when you plan to process heavy industrial materials. A high shock load rating is important in giving the compactor the ability to crush through large loads without damage to the drive.

6 Worry-Free Chain and Bearing Lubrication System

The engineered, automatically lubricated chain, coupled with the self-lubricating bearing system with automatic grease purge cuts down on routine maintenance.

The auger compacts directly into a standard roll-off receiving container typically provided by your local hauler, and meets ANSI and OSHA specifications.

